




VEGA 600 Plus VEGA 750 Plus

Servo Driven High Speed Side Seal Bag Makers

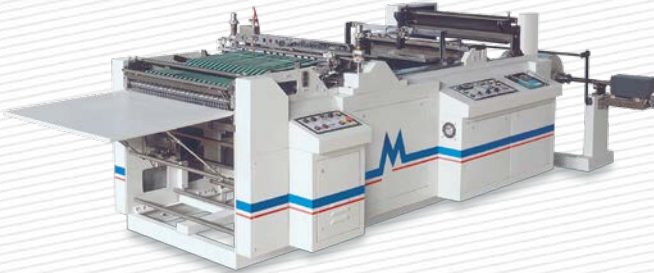

A value for money Side Weld Bag Makers, a perfect balance of productivity and price. At 325/400 strokes/minute, it can convert PP/LD-LLDPE / HDPE materials from 10 to 100 microns. Solution to your High Speed Side Seal requirements.

SPECIFICATIONS	VEGA 600 Plus		VEGA 750 Plus	
Types of Webs / Films	HM-HDPE / LDPE / LLDPE / PP / CPP / BOPP			
Film Thickness (microns)	Maximum	Minimum	Maximum	Minimum
• HM-HDPE	80	10	80	10
• LDPE / LLDPE	100	20	100	20
• PP	75	20	75	20
• CPP	75	20	75	20
• BOPP	40	20	40	20
Film Roll Diameter	Depends on Unwinder Selection (wide range of Unwind options available)			
Web Width (mm)	600#	150	800#	150
Draw Length (mm)	600	25	750	50
Maximum Speed* (cys./min.)	300 / 400		325 / 400	
Motors				
Off-Wind	AC Motor		AC Motor	
Film Index / Film Draw	AC Brushless Servo Motor		AC Brushless Servo Motor	
Main Drive (Sealing Head)	AC Motor		AC Motor	
Product Conveyor Drive	AC Motor		AC Motor	
General				
Electrical Power	AC 3 Phase 220/240/380/415/480 ± 6% Volt, 50/60 Hz			
Connected Load (kW)	10		10	
Air Consumption @ NTP (ltr./min.)	500		500	
Foot Print (L x W x H) (mm)	4050 x 1400 x 1350 (w/o Unwinder)		4050 x 1550 x 1350 (w/o Unwinder)	
Machine Weight	~1.25 MT (For Basic Machine)		~1.5 MT (For Basic Machine)	

ATTACHMENTS

- Wide Range of Unwinders
- Film Folding Device (A-Frame)
- Lip Formation + Lip Sealing
- Bottom Gusset Assembly
- Tape Applicator
- Dotted Seal
- Linear Perforation Assembly
- Round Hole Punch
- Hanger (Euro Hole) Punch
- Pin Hole Punch
- Wicket Hole Punch
- Ejecto Carry Handle Punch
- Ultrasonic Knurling
- Strip Insertion
- Opti-Stack System
- Auto Stacker
- "V" Cut Attachment (Cold Cut)
- Customer Special Requirement

Special Configuration: For String Zip Bag Making



* Actual output depends on the type of Bag, Material, Thickness, Width & Draw-Length.
Maximum usable width of machines may be change with attachments.

